


Kaliberübersicht

Kipplaufbüchse K95

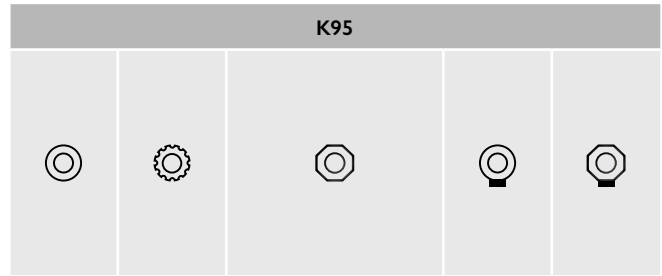

Verfügbare Lauflängen in mm (Kurzausführung optional gegen Mehrpreis)				K95					
Kalibergruppen HO, MI, ST, R				600 (520)		500		500	
Kalibergruppen ME, MA				650 (600)				500	
Kalibergruppe CH				680					
	Kalibergruppe	Dralllänge in mm / Zoll	Hinweis						
HO	.22 Hornet	406 mm / 16"		●	●				
MI	.222 Rem.	305 mm / 12"		●	●				
ST	.243 Win.	254 mm / 10"		●	●	●	●		●
	6XC	203 mm / 8"		●	●				●
	6,5 mm Creedmoor	203 mm / 8"		●	●	●	●		●
	6,5x55 SE	220 mm		●	●	●	●	●	●
	6,5 PRC	203 mm / 8"	1)	●	●				
	.270 Win.	254 mm / 10"		●	●	●	●	●	●
	.308 Win.	279 mm / 11"		●	●	●	●	●	●
	.30-06	279 mm / 11"		●	●	●	●	●	●
	8,5x55 Blaser	305 mm / 12"		●		●	●		●
	R	5,6x50 R Mag.	305 mm / 12"		●	●			●
5,6x52 R		270 mm			●			●	
6,5x57 R		200 mm		●	●	●	●	●	●
6,5x65 R RWVS		200 mm		●	●			●	
7x57 R		220 mm		●	●	●	●	●	●
7x65 R		220 mm		●	●	●	●	●	●
.30 R Blaser		279 mm / 11"		●	●	●		●	●
8x57 IRS		240 mm		●	●	●	●	●	●
9,3x74 R		360 mm		●					
ME	8x68 S	280 mm		●					
MA	.257 Weath. Mag.	254 mm / 10"		●	●	●			
	.270 Weath. Mag.	254 mm / 10"		●					
	7 mm Blaser Mag.	254 mm / 10"		●	●	●		●	●
	7 mm Rem. Mag.	241 mm / 9,5"		●		●		●	
	.300 Blaser Mag.	279 mm / 11"		●		●			
	.300 Win. Mag.	279 mm / 11"		●		●			
CH	10,3x60 R	450 mm				●			

HO = Kleinkaliber
 MI = Mini
 ST = Standard
 R = Rand
 ME = Medium
 MA = Magnum
 CH = Schweiz

⊙ = rund
 ⊙ = kanneliert
 ⊙ = Achtkant
 ⊙ = Stutzenlauf rund
 ⊙ = Stutzenlauf Achtkant

● = erhältlich

1) Standardlauflänge 650 mm.